


## EASY Series 6KVA-10KVA 1:1 Phase PF: 1.0



- Online double conversion
- N+X Parallel Redundancy
- Wide input voltage range (110~300Vac)
- Input power factor 0.99 (With PFC)
- Output power factor 1.0
- Maximum charging current 12A (Long run unit)
- Charging current can be set by LCD
- 50Hz/60Hz frequency converter mode
- Emergency power off function (EPO)
- Eco mode operation for energy saving (ECO)
- Estimated Remaining Time on LCD
- Generator compatible
- Cold start
- Load controlled fan
- SNMP / USB / RS232 multiple communications
- Low priority load disconnection function
- Selectable output voltage: 200, 208, 220, 230, 240Vac
- Smart battery charging design for optimizing battery performance
- 1A or 2A charging current can be selected 2A charging current is for 2 groups of inside batterie



EASY series is the new generation of small to medium power transformer-less UPS of META SYSTEM UK LIMITED. EASY series adopts new circuit design, and electrical performance is optimized. The series is with reasonable inside arrangement, the dimension of the unit is small and the power density is high. The appearance is simple and beautiful by new design. Advanced design makes EASY series more reliable and high power efficient, and reduce the TCO (total cost ownership) in result. Miniaturization design reduces the transportation space and installation space, and this also make it easy to maintain the EASY series for customers. EASY series can support lithium battery and this supplies more choices to customers.

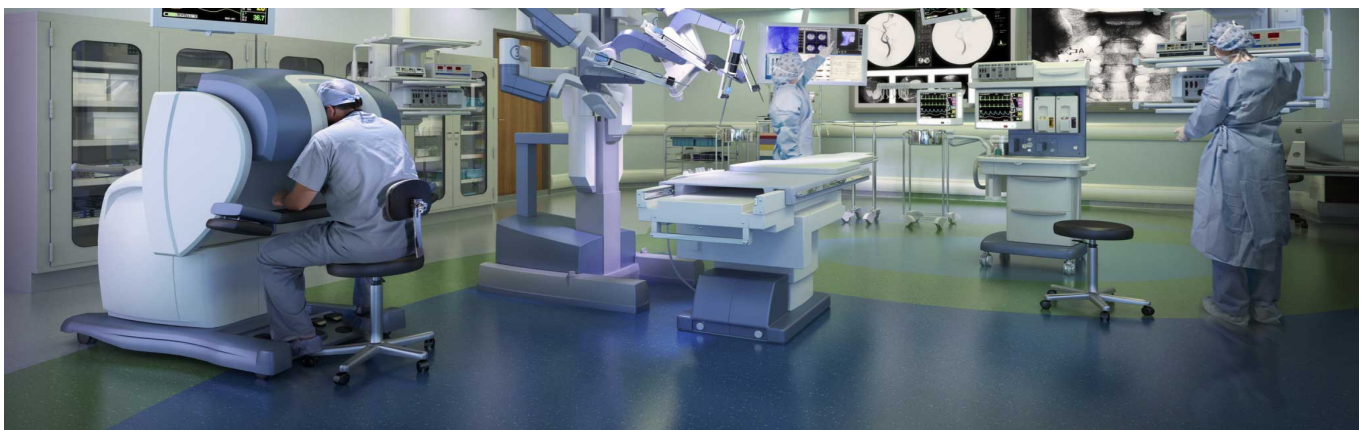

## Technical Specifications:

MODEL	ESY6000	ESY6000L	ESY10000	ESY10000L
Capacity (VA/Watts)	6K/6K	6K/6K	10K/10K	10K/10K
<b>INPUT</b>				
Nominal Voltage	220/230/240Vac			
Operating Voltage Range	120~276Vac			
Frequency Range	50Hz:45~55Hz; 60Hz:54~66Hz(auto sensing)			
Power Factor	≥0.99			
Bypass voltage range	Max.voltage: 220V: +25%(optional +10%,+15%,+20% ) 230V: +20% (optional +10%,+15%), 240V: +15% (optional +10%) Min.voltage: -45% (optional -20%,-30%)			
Bypass frequency range	Frequency protection range:±10%			
ECO range	Same as the bypass			
Harmonic distortion (THDi)	<3%(100% linear load)			
Generator input	Support			
<b>OUTPUT</b>				
Output Voltage	220/230/240Vac			
Power Factor	1			
Voltage Regulation	±1%			
Frequency	Line Mode	±1%/±2%/±4%/±5%/±10% of the rated frequency(optional)		
	Bat. Mode	50/60(±0.1)Hz		
Crest Factor	3:01			
Harmonic Distortion (THDv)	≤2% with linear load			
	≤5% with non-linear load			
Efficiency	>92%		>93%	
<b>BATTERY</b>				
Battery voltage	±96/108/120Vdc (optional)			
Capacity (standard unit)	12V-7Ah/9Ah			
Typical recharging time	6~8 hours (to 90% of full capacity)			
Charging current	1A(Standard unit); Long run unit Max.current10A(charging current can be set according to battery capacity installed)			
<b>SYSTEM FEATURES</b>				
Transfer time	Mains to battery:0ms; Mains to bypass:0ms			
Overload	Line Mode	Load≤110%: last 10min, ≤130%: last 1min, >130% turn to bypass mode immediately		
	Bypass Mode	40A(Breaker)	80A(Breaker)	
Short circuit	Hold whole system			
Overheat	Line Mode: Turn to Bypass; Bat. Mode: Shut down UPS immediately			
Battery low	Alarm and switch off			
Self-diagnostics	Upon power on and software control			
Battery	Advanced battery management			
Audible & Visual alarms	Line failure, Battery low, Overload, System fault			
LED & LCD display	Line mode, Bat. mode, Eco mode, Bypass mode, Battery under voltage, Overload & UPS fault			
LCD display	Input voltage, Input frequency, Output voltage, Output frequency, Load percentage, Battery voltage, Inner temperature & Remaining battery backup time			
Communication interface	RS232,USB,SNMP card(optional), Parallel card(optional), Relay card (optional)			
<b>ENVIRONMENT</b>				
Operating temperature	0°C~40°C			
Storage temperature	-25°C~55°C			
Humidity range	0~95% (non-condensing)			
Altitude	< 1500m			
Noise level	<55dB			
<b>PHYSICAL</b>				
Dimension W×D×H (mm)	Standard model:191*460*720 ; long run model:191*405*330			
Net weight (kg)	Standard :60kg ; long run :11kg		Standard :61kg ; long run :12kg	
<b>STANDARDS</b>				
Safety	IEC/EN62040-1,IEC/EN60950-1			
EMC	IEC/EN62040-2,IEC61000-4-2,IEC61000-4-3,IEC61000-4-4, IEC61000-4-5,IEC61000-4-6,IEC61000-4-8			

